


1 ANODE RED
2 COMMON CATHODE
3 ANODE GREEN

3MM TRI-COLOUR LED
Sidetracked Electronics Code L3TRI.

SPECIFICATIONS

- Common Cathode.
- Recommended forward current for red LED = 20mA. Forward voltage = 2.0V @ 20mA
- Recommended forward current for green LED = 20mA. Forward voltage = 2.2V @ 20mA

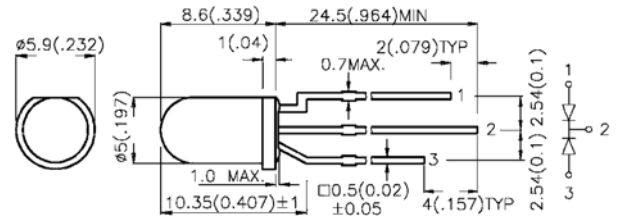

1 ANODE RED
2 COMMON CATHODE
3 ANODE GREEN

5MM TRI-COLOUR LED
Sidetracked Electronics Code L5TRI.

SPECIFICATIONS

- Common Cathode.
- Recommended forward current for red LED = 20mA. Forward voltage = 2.0V @ 20mA
- Recommended forward current for green LED = 20mA. Forward voltage = 2.2V @ 20mA